




SPC – 4

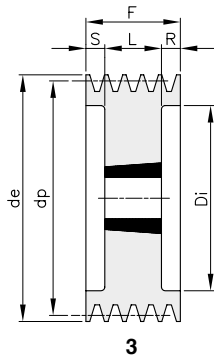


3

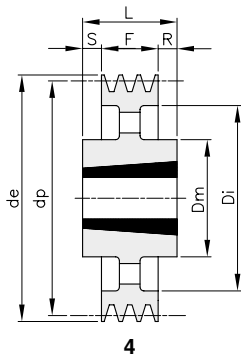

4

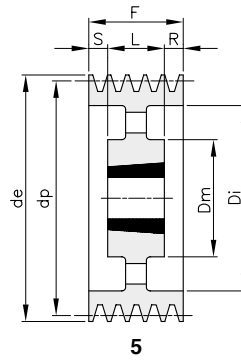

5

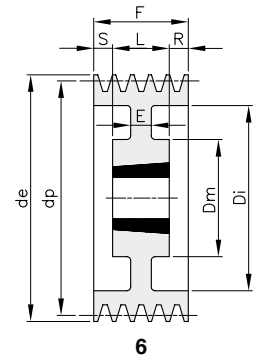

6

Werkstoff: Grauguss EN-GJL-200

| Beschreibung | Artikelnr. | Rille | dp | de | Typ | Spannbuchsen | Bohrung max. | Dm | Di | E | F | L | R | S | kg |
|--------------|------------|-------|------|--------|-----|--------------|--------------|-----|------|----|-----|-----|-----|-----|--------|
| SPC 200 04 | TC040200 | 4 | 200 | 209,6 | 3 | 3020 | 75 | | 144 | | 111 | 51 | 30 | 30 | 11,00 |
| SPC 212 04 | TC040212 | 4 | 212 | 221,6 | 3 | 3020 | 75 | | 156 | | 111 | 51 | 30 | 30 | 12,50 |
| SPC 224 04 | TC040224 | 4 | 224 | 233,6 | 3 | 3535 | 90 | | 168 | | 111 | 89 | 11 | 11 | 16,00 |
| SPC 236 04 | TC040236 | 4 | 236 | 245,6 | 3 | 3535 | 90 | | 180 | | 111 | 89 | 11 | 11 | 18,50 |
| SPC 250 04 | TC040250 | 4 | 250 | 259,6 | 3 | 3535 | 90 | | 194 | | 111 | 89 | 11 | 11 | 22,00 |
| SPC 265 04 | TC040265 | 4 | 265 | 274,6 | 3 | 3535 | 90 | | 209 | | 111 | 89 | 11 | 11 | 26,00 |
| SPC 280 04 | TC040280 | 4 | 280 | 289,6 | 6 | 3535 | 90 | 175 | 224 | 18 | 111 | 89 | 11 | 11 | 25,40 |
| SPC 300 04 | TC040300 | 4 | 300 | 309,6 | 6 | 3535 | 90 | 175 | 244 | 20 | 111 | 89 | 11 | 11 | 30,00 |
| SPC 315 04 | TC040315 | 4 | 315 | 324,6 | 5 | 3535 | 90 | 175 | 259 | | 111 | 89 | 11 | 11 | 24,00 |
| SPC 335 04 | TC040335 | 4 | 335 | 344,6 | 5 | 3535 | 90 | 175 | 279 | | 111 | 89 | 11 | 11 | 27,00 |
| SPC 355 04 | TC040355 | 4 | 355 | 364,6 | 5 | 3535 | 90 | 175 | 299 | | 111 | 89 | 11 | 11 | 28,30 |
| SPC 375 04 | TC040375 | 4 | 375 | 384,6 | 5 | 3535 | 90 | 175 | 319 | | 111 | 89 | 11 | 11 | 30,00 |
| SPC 400 04 | TC040400 | 4 | 400 | 409,6 | 5 | 3535 | 90 | 175 | 344 | | 111 | 89 | 11 | 11 | 34,00 |
| SPC 425 04 | TC040425 | 4 | 425 | 434,6 | 5 | 3535 | 90 | 175 | 369 | | 111 | 89 | 11 | 11 | 35,00 |
| SPC 450 04 | TC040450 | 4 | 450 | 459,6 | 5 | 3535 | 90 | 175 | 394 | | 111 | 89 | 11 | 11 | 37,00 |
| SPC 475 04 | TC040475 | 4 | 475 | 484,6 | 5 | 3535 | 90 | 175 | 419 | | 111 | 89 | 11 | 11 | 39,00 |
| SPC 500 04 | TC040500 | 4 | 500 | 509,6 | 5 | 3535 | 90 | 175 | 444 | | 111 | 89 | 11 | 11 | 43,00 |
| SPC 530 04 | TC040530 | 4 | 530 | 539,6 | 5 | 4040 | 100 | 210 | 474 | | 111 | 102 | 4,5 | 4,5 | 50,00 |
| SPC 560 04 | TC040560 | 4 | 560 | 569,6 | 5 | 4040 | 100 | 210 | 504 | | 111 | 102 | 4,5 | 4,5 | 54,00 |
| SPC 630 04 | TC040630 | 4 | 630 | 639,6 | 4 | 4545 | 110 | 242 | 574 | | 111 | 114 | 1,5 | 1,5 | 66,00 |
| SPC 710 04 | TC040710 | 4 | 710 | 719,6 | 4 | 5050 | 125 | 267 | 654 | | 111 | 127 | 8 | 8 | 82,00 |
| SPC 800 04 | TC040800 | 4 | 800 | 809,6 | 4 | 5050 | 125 | 267 | 737 | | 111 | 127 | 8 | 8 | 100,00 |
| SPC1000 04 | TC041000 | 4 | 1000 | 1009,6 | 4 | 5050 | 125 | 267 | 937 | | 111 | 127 | 8 | 8 | 126,00 |
| SPC1250 04 | TC041250 | 4 | 1250 | 1259,6 | 4 | 5050 | 125 | 267 | 1187 | | 111 | 127 | 8 | 8 | 175,00 |